

Instromet[®]

TURBINE GAS METER SM-RI-X

TURBINE GAS METER SM-RI-X



M-SMRI-X-17

E

GENERAL

The INSTROMET SM-RI-X turbine meter is an integrating flow meter for the measurement of gases. The volume of gas passed through the meter, at the operating pressure and temperature, is indicated on a counter in units of volume (m³ or cuft). The volume registered can be converted to a reference volume (Nm³) by application of a volume integrator such as the INSTROMET electronic flow computers and electronic volume correctors. The SM-RI-X turbine meter is based on the proven SM-RI concept and incorporates the patented X4X[®] flow conditioner. Its superior characteristics are maintained in practical, non-ideal installations. The SM-RI-X turbine gas meter is approved for custody transfer applications according to EEC Directives and by many other international approval authorities.

APPLICATIONS

The standard SM-RI-X meter is suitable for all non-corrosive gases such as natural gas, propane, butane, air, nitrogen, ethylene, hydrogen etc. Special construction can be supplied for use with corrosive gases.

The SM-RI-X turbine meters are widely used for custody transfer of natural gas. They are also used for industrial loads, in distribution stations, major supply stations and as master reference meters.

GENERAL TECHNICAL DATA

| | |
|---------------------------|---|
| Pressure ratings | : PN 10 to PN 100 and ANSI 125 to ANSI 600. Higher pressure ratings on request. |
| Nominal diameters | : 50 mm (2") to 600 mm (24"). Larger sizes on request. |
| Flow rates | : Up to 25,000 m ³ /h (line conditions). |
| Measurement range | : 20:1 minimum at atmospheric conditions*. |
| Installation | : Up to 200 mm (8") horizontal or vertical on request, over 200 mm horizontal only. |
| Repeatability | : 0.1 % |
| Measuring accuracy | : 0.2 Q _{max} → Q _{max} : ± 0.5% Q _{min} → 0.2 Q _{max} : ± 1% (see page 3) |
| Temperature range | : -10° C to + 65° C. Other temperature ranges on request. |

*Some smaller size meters have reduced ranges.

CONSTRUCTION

The main parts of the SM-RI-X turbine gas meter are:

1. Meter body (length = 3 x D)
2. Measuring mechanism including turbine wheel
3. Inlet flow conditioner X4X[®] (patented)
4. Mechanical drive and magnetic coupling to bring turbine wheel rotation outside the pressure body
5. Mechanical counter for registering the volume measured
6. Oil lubrication system for the turbine wheel shaft bearings

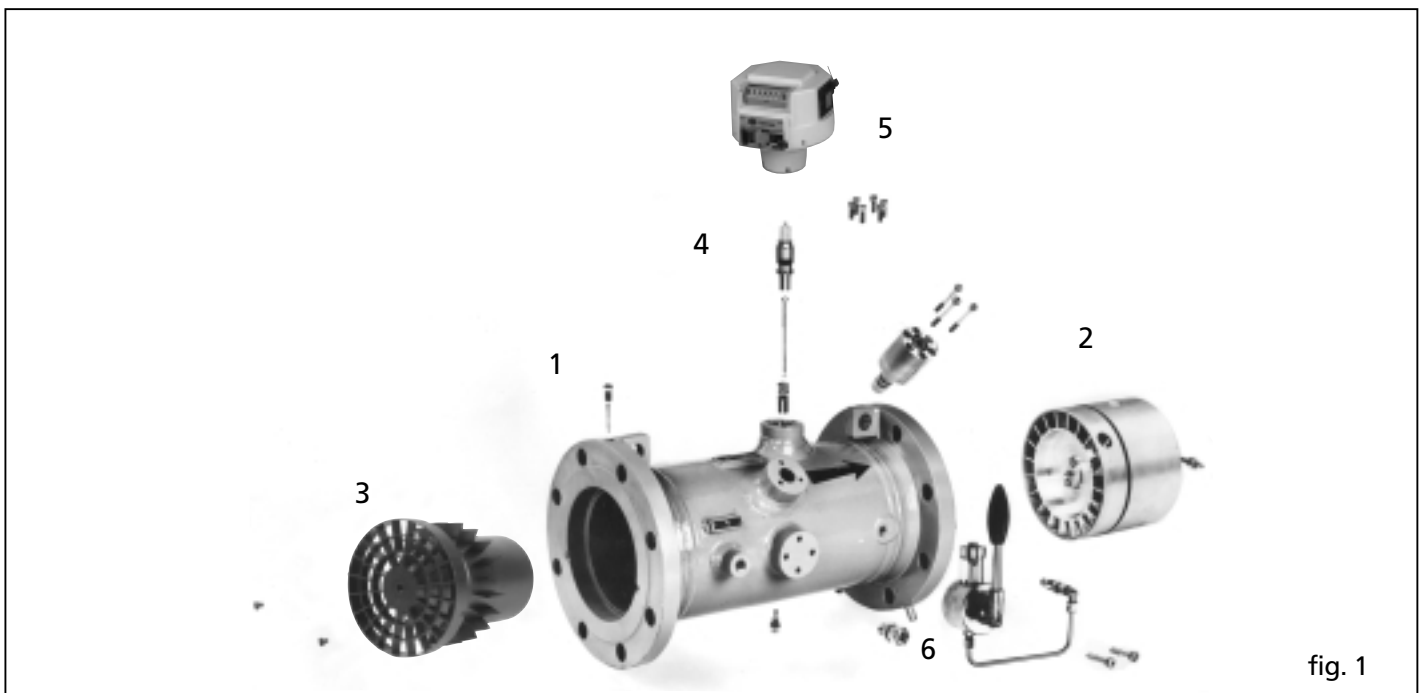


fig. 1

OPERATING PRINCIPLE

The flowing gas enters the meter through a built-in flow conditioner (1) that conditions the flow profile and increases the gas velocity. The gas continues along the flow channel (2) and enters the turbine rotor. The turbine rotor blading (3) is designed with overlap to give complete guidance to the flowing gas and extract the maximum energy at low gas velocities. The turbine wheel's angular velocity is proportional to the average gas velocity flowing through the meter. The gas exits the turbine rotor through a flow ring and an expanding exit channel to minimize pressure losses. The rotation of the turbine rotor is transmitted via a gear train and transferred from the pressurized meter body to the counter (5) by a gas tight magnetic coupling (4). The follower magnet of the magnetic coupling drives the counter to register volumes metered at the operating conditions.

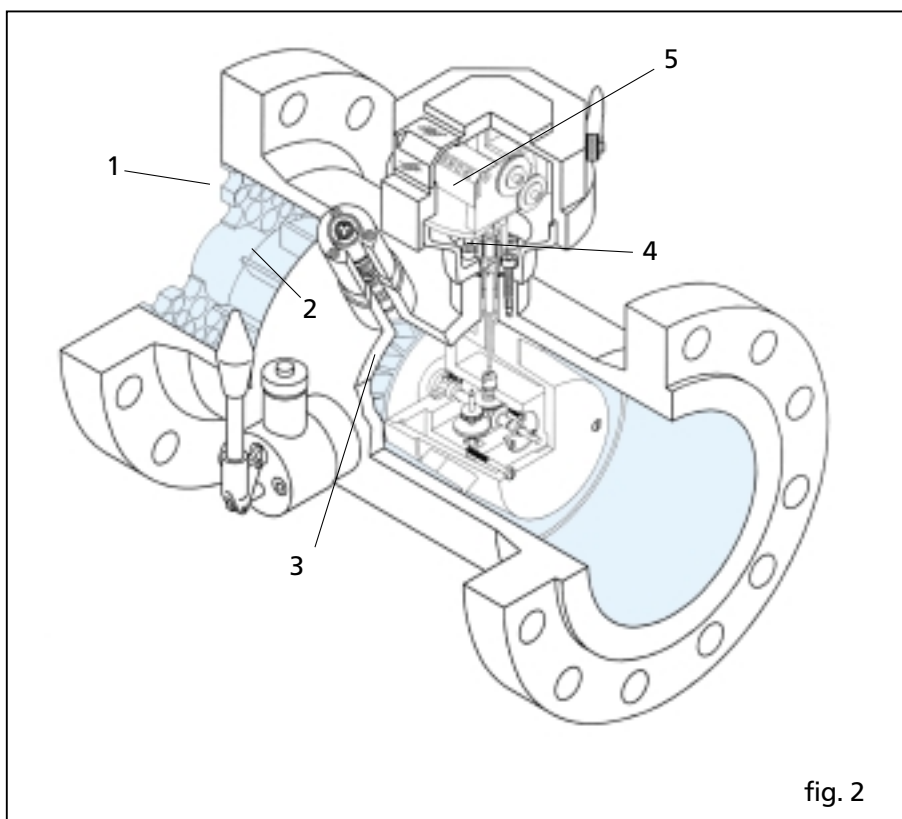


fig. 2

MEASURING RANGE

The measuring range of the SM-RI-X determined for atmospheric conditions meets with, and generally exceeds, European and all major international standards.

At higher operating pressures the measuring range of the turbine meters will increase since the required kinetic energy transfer to the turbine rotor occurs at lower velocities. The following equation may be used to estimate the minimum flow rate of the meter for various operating conditions.

$$Q = Q_m \sqrt{\frac{P(\text{atm})}{P} \times \frac{1.29}{\rho}}$$

- Q = minimum capacity under operating conditions
- Q_m = minimum capacity for meter accuracy - see table page 6
- p = operating pressure of the meter in bar absolute
- p(atm) = atmospheric pressure in bara (1.01325 bara)
- ρ = Density of the gas at atmospheric pressure - see table page 7

ACCURACY / TYPICAL CALIBRATION CURVE

Each SM-RI-X turbine gas meter is tested with atmospheric air to traceable calibrated references. The INSTROMET error limits are half those allowed by EU standards, OIML recommendation R32 and ISO 9951. For pressures of 8 bar and above, meters calibrated within even narrower limits are available. Optionally, meters can be calibrated with natural gas at pressures up to 64 bar, using test installations traceable to primary standards.

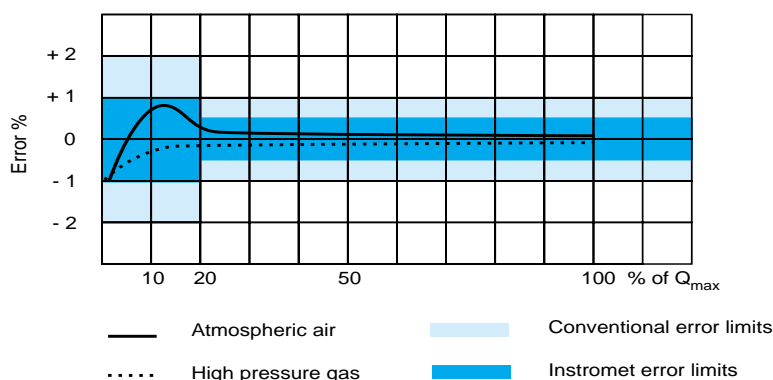


fig. 3 Typical calibration curves of SM-RI-X meter

METER INDEX, PULSERS

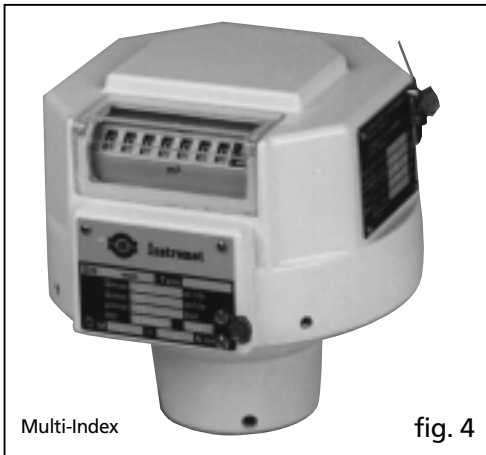


fig. 4

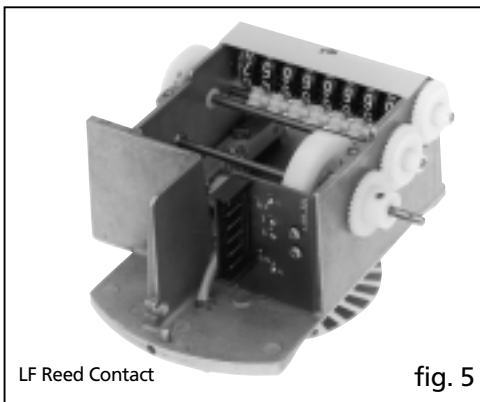


fig. 5

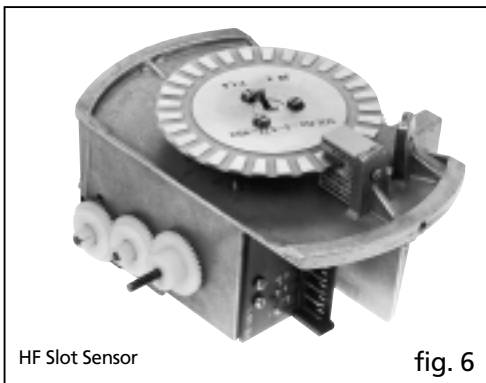


fig. 6

Standard Multi-Index

The standard index is a multi-index as shown, fitted with a reed contact to provide a low frequency pulse. (Impulse values see page 6)

The impulse is accessed through an electrical connection. The counter is readable over a 90° field of vision and has 8 digits.

Possible Index Options:

- LF double pulser (Reed contact)
- HF pulser (Slot sensor)
- HF double pulser (Slot sensor)
- HF/LF pulse combinations
- Anti-fraud reed contact
- Mechanical drive - (Type 25 H7 according to DIN 33800)
- Reverse current barrier
- Remote read-out of counter via HART protocol (Digitur)
- "Cryo" index extension to prevent icing problems in meters operating with sub-zero temperature gas
- Drying agent option (aluminium silicate)
- Tropical operation
- Polyepoxy coated material - for corrosive environment

Connector Options

Standard:

Pins 1 and 4 = LF Reed contact

Pins 3 and 6 = HF slot sensor

or according to customer's requirements

All connector combinations are indicated on the type plate.

HF PROXIMITY SENSOR - TURBINE WHEEL/REFERENCE WHEEL

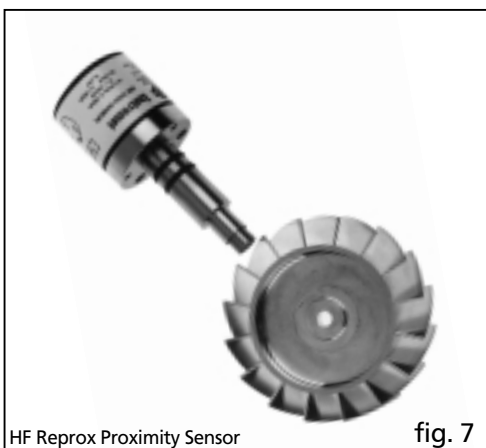


fig. 7

Each turbine gas meter equipped with an aluminium turbine wheel can be fitted with a Reprox probe type pulse sensor. As each turbine blade passes the proximity sensor a pulse is produced, the number of which is proportional to the speed of the wheel and thus the quantity of gas can be determined (for pulse values see page 6).

A proximity sensor can also be fitted above a toothed reference wheel fitted on the main shaft. These impulse values are identical to the values produced by the turbine blades. The electrical separation between the hazardous and non-hazardous areas is accomplished by an intrinsically safe isolation amplifier, type Mk 15-PRN-Ex0/K11.

DIFFERENT TURBINE GAS METER MODELS

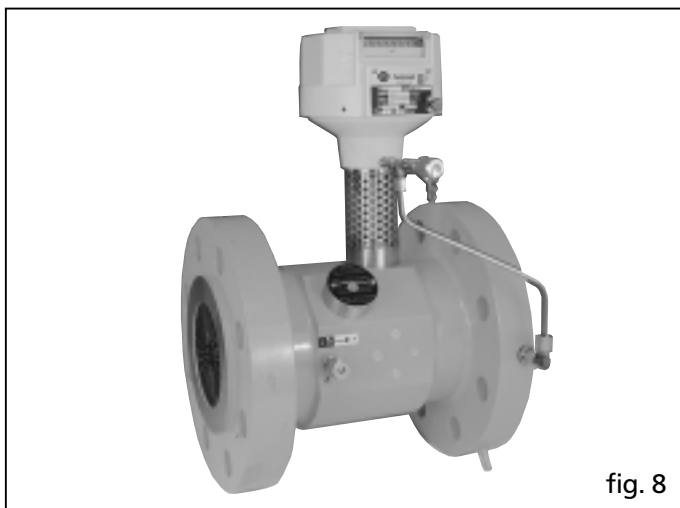


fig. 8

SM-RI "Cryo" to measure sub-zero temperature gas.

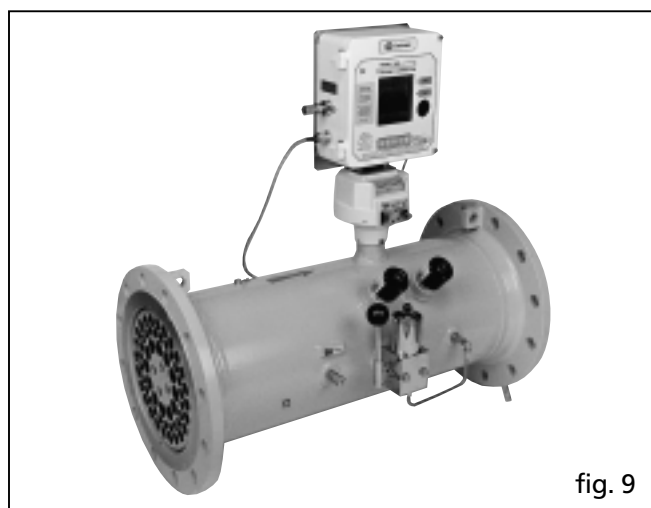


fig. 9

SM-RI-X with Model 999 electronic volume corrector.

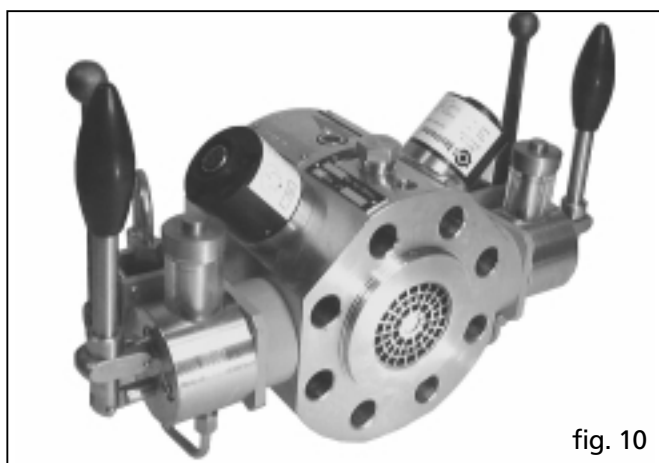


fig. 10

SM-RI-P high pressure turbine gas meter for the measurement of ethylene with a very high density.

IN SITU INSPECTION AND SPIN TEST

Optionally a special port can be provided to allow visual inspection of the turbine wheel without removing the meter mechanism from the line. This port can also be used to test the conditions of the bearings by means of a spin test.

ELECTRONIC VOLUME CORRECTORS AND ASSOCIATED PRODUCTS

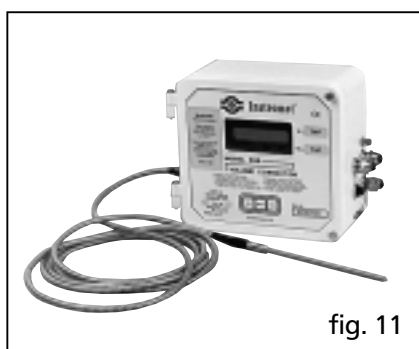


fig. 11

Model 555 or 999 Corrector

User configurable, highly accurate electronic volume corrector with an extremely versatile logging capability correcting for temperature and pressure.

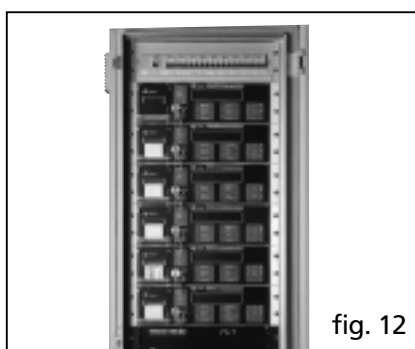


fig. 12

Series 793 Flow Computer

For remote calculation of flow quantity in base volume and energy without any additional error. Temperature and pressure are digitally read using a HART bus.



fig. 13

Tru-Therm Calorimeter

For real-time measurement. Provides total energy flow and gas quality at bare conditions.

MEASUREMENT RANGE/PRESSURE LOSS/PULSE VALUES

| pipe size mm (inch) | G-rating | measurement range (m ³ /h) Q _{min} - Q _{max} *1 | pressure loss at Q _{max} natural gas ρ = 0.8 kg/m ³ | m ³ per rev | LF pulses per m ³ | | HF-index Hz at Q _{max} | No. of turbine blades | HF *2 Signal reference wheel Hz at Q _{max} | Turbine wheel *4 | |
|---------------------|----------------|--|---|------------------------|------------------------------|-----|---------------------------------|-----------------------|---|------------------|--------|
| | | | | | 1 | 10 | | | | ALU | Delrin |
| 50 (2") | G 40 | 13 - 65 | 3 | 0.1 | 10 | 100 | 136 | 1690 * 3 | 12 | ● | ○ |
| | G 65 | 10 - 100 | 6.5 | 0.1 | 10 | 100 | 210 | | | 2600 * 3 | ● |
| 80 (3") | G 100 | 8 - 160 | 3 | 1 | 1 | 10 | 105 | 1280 * 3 | 12 | ● | ○ |
| | G 160 | 13 - 250 | 8 | 1 | 1 | 10 | 163 | 2000 * 3 | | ● | ○ |
| | G 250 | 20 - 400 | 21 | 1 | 1 | 10 | 149 | 1800 * 3 | | ● | - |
| 100 (4") | G 160 | 13 - 250 | 2 | 1 | 1 | 10 | 98 | 1100 * 3 | 16 | ● | ○ |
| | G 250 | 20 - 400 | 5 | 1 | 1 | 10 | 158 | 1760 * 3 | | ● | ○ |
| | G 400 | 32 - 650 | 13 | 1 | 1 | 10 | 143 | 1570 * 3 | | ● | - |
| 150 (6") | G 400 | 32 - 650 | 3.5 | 1 | 1 | 10 | 151 | 1180 | 20 | ● | ○ |
| | G 650 ≤ 10 bar | 50 - 1,000 | 8.5 | 1 | 1 | 10 | 232 | 1815 | | ● | ○ |
| | G 650 ≥ 10 bar | 50 - 1,000 | 7.0 | 1 | 1 | 10 | 133 | 1060 | | ● | ○ |
| | G 1000 | 80 - 1,600 | 16.5 | 1 | 1 | 10 | 213 | 1700 | | ● | - |
| 200 (8") | G 650 | 100 - 1,000 | 1.5 | 10 | 0.1 | 1 | 55 | 770 | 20 | ● | - |
| | G 1000 | 80 - 1,600 | 3 | 10 | 0.1 | 1 | 85 | 1180 | | ● | - |
| | G 1600 | 130 - 2,500 | 8 | 10 | 0.1 | 1 | 83 | 1060 | | ● | - |
| 250 (10") | G 1000 | 80 - 1,600 | 1.5 | 10 | 0.1 | 1 | 88 | 825 | 24 | ● | - |
| | G 1600 | 130 - 2,500 | 4.5 | 10 | 0.1 | 1 | 142 | 1320 | | ● | - |
| | G 2500 | 200 - 4,000 | 10 | 10 | 0.1 | 1 | 126 | 1200 | | ● | - |
| 300 (12") | G 1600 | 130 - 2,500 | 1.5 | 10 | 0.1 | 1 | 48 | 810 | 24 | ● | - |
| | G 2500 | 200 - 4,000 | 5 | 10 | 0.1 | 1 | 76 | 1270 | | ● | - |
| | G 4000 | 320 - 6,500 | 14 | 10 | 0.1 | 1 | 70 | 1175 | | ● | - |
| 400 (16") | G 2500 | 200 - 4,000 | 1.5 | 10 | 0.1 | 1 | 160 | 660 | 24 | ● | - |
| | G 4000 | 320 - 6,500 | 5 | 10 | 0.1 | 1 | 256 | 1055 | | ● | - |
| | G 6500 | 500 - 10,000 | 13 | 10 | 0.1 | 1 | 220 | 890 | | ● | - |
| 500 (20") | G 4000 | 320 - 6,500 | 1.5 | 10 | 0.1 | 1 | 130 | 530 | 24 | ● | - |
| | G 6500 | 500 - 10,000 | 6.5 | 10 | 0.1 | 1 | 210 | 865 | | ● | - |
| | G 10000 | 800 - 16,000 | 15 | 10 | 0.1 | 1 | 192 | 770 | | ● | - |
| 600 (24") | G 6500 | 500 - 10,000 | 1.5 | 100 | 0.1 | 0.1 | 48 | 470 | 24 | ● | - |
| | G 10000 | 800 - 16,000 | 5 | 100 | 0.01 | 0.1 | 75 | 720 | | ● | - |
| | G 16000 | 1,300 - 25,000 | 10.5 | 100 | 0.01 | 0.1 | 68 | 650 | | ● | - |

* 1: Measurement range 1:30 on request

* 3: HF sensor on reference wheel not available

* 2: Indicated HF frequencies are nominal values
Actual values are specific

* 4: ● Standard construction
○ Option / special design for PN10 / ANSI 125

A HF proximity switch or a HP calibration is only possible with aluminium turbine wheels.

A temperature well in the meter housing is available for meters 80 mm (3") and larger.
For the connection of pressure sensors (e.g. for a volume corrector) a "Pr" point is integrated in the meter body.

Meters larger than 600 mm (24") and other variations to the above specifications are available by special request.

MEASUREMENT OF VARIOUS GASES

Applicable to clean dry gases from -10° C to +65° C. Other temperature ranges by special request.

S = Standard Materials

T = Corrosion resistant coated body and internals (except plastic and stainless steel parts)

1) = Special o-rings

2) = Special lubrications

3) = Special turbine wheels

4) = Except food industry

5) = For super-critical Ethylene and Propylene use SM-RI-P

6) = For oxygen special conditions apply

| Gas | Formula | Density at 0° C 1.013 bar (kg/m ³) | Meter housing | Remarks |
|---------------------|---------------------------------|--|---------------|--------------------------|
| Natural gas | CH ₄ | 0.8 | S | |
| Acetylene | C ₂ H ₂ | 1.17 | T | CRC coated |
| Ammonia | NH ₃ | 0.77 | S | 1) 2) |
| Argon | Ar | 1.78 | S | |
| Butane | C ₄ H ₁₀ | 2.70 | S | |
| Biogas | — | — | T | 1) 2) 3) |
| Ethane | C ₂ H ₆ | 1.36 | S | |
| Ethylene | C ₂ H ₄ | 1.26 | S | 1) 5) |
| Freon 12 (gas) | CCl ₂ F ₂ | 5.66 | S | 1) 2) |
| Helium | He | 0.18 | S | higher Qmin |
| Carbon Dioxide | CO ₂ | 1.98 | S | 4) |
| Carbon Monoxide | CO | 1.25 | S | |
| Air | N ₂ + O ₂ | 1.29 | S | |
| Methane | CH ₄ | 0.72 | S | |
| Pentane | C ₅ H ₁₂ | 3.46 | S | |
| Propane | C ₃ H ₈ | 2.02 | S | |
| Propylene (gaseous) | C ₃ H ₆ | 1.92 | S | 1) 5) |
| Sewer/Manure gas | — | — | T | 1) 2) |
| Town gas | — | — | S | |
| Sulphide gas | — | — | T | 1) |
| Nitrogen | N ₂ | 1.25 | S | |
| Hydrogen | H ₂ | 0.09 | T | higher Qmin |
| Oxygen (pure) | O ₂ | 1.43 | S | 1) 2) 6) special constr. |
| Sulphur dioxide | SO ₂ | 2.93 | T | 1) special constr. |
| Hydrogen sulphide | H ₂ S | 1.54 | T | 1) 2) |

NOTE:

- For wet gases, a special coating can be applied to the body's inside surfaces
- For corrosive environment, external surfaces and index head can be coated
- For higher or lower temperatures special lubrication and materials can be supplied

PRESSURE LOSS FORMULA

The average pressure loss (see table page 6) of the SM-RI-X turbine meter using atmospheric natural gas with a relative density of 0.6 and measured at one (1) diameter upstream to one (1) diameter downstream of the meter on straight pipe of the same size as the meter.

The pressure loss across the SM-RI-X for various gases and other operating pressures may be approximated from the following equation.

$$\Delta P_2 = \Delta P_1 \cdot \frac{d}{0.6} \cdot \left(\frac{P_m}{P_{atm}} \right) \cdot \left(\frac{Q}{Q_{max}} \right)^2 \text{ [mbar]}$$

ΔP_2 = Pressure drop at P_m and Q- mbar

ΔP_1 = Pressure drop at Q_{max} (see table page 6)

P_m = Operating pressure absolute

P_{atm} = Atmospheric pressure 1.013 bara

Q = Instantaneous flow rate in m³/h

Q_{max} = Max. flow rate in m³/h

d = Relative density of the gas (air = 1)

HOW TO ORDER

In order to provide the meter best suited for your application, please provide the following information:





- Pipe diameter
- Gas flow quantity, min & max
- Gas flow direction
- Operating pressures, min & max
- Operating temperatures, min & max
- Ambient temperatures, min & max
- Type of gas
- Flange class, DIN or ANSI
- Type of Index - pulse options
- Proximity Switch(es) - Turbine, reference wheel
- High Pressure Calibration required ?
- Metrological and/or materials certificates required.

INSTALLATION GUIDELINES

- The SM-RI-X fulfills all the requirements of the European and major international directives, standards and guidelines, in particular those of OIML, ISO and DVGW.
- With the integrated X4X® (patented) flow straightener, the SM-RI-X eliminates the effect of perturbations on gas measurement and satisfies the exacting requirements of the International Standard ISO 9951 with only 2 x diameter of upstream piping. This permits the design of very compact installations without a significant effect on accuracy.

- The superior performance of the X4X flow straightener was confirmed by tests carried out by a number of European gas transmission companies. Copies of this report are available on request.

Possible Installation Configurations

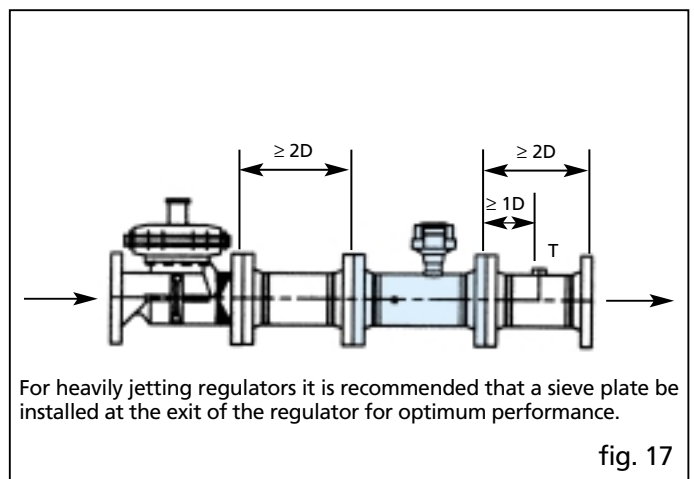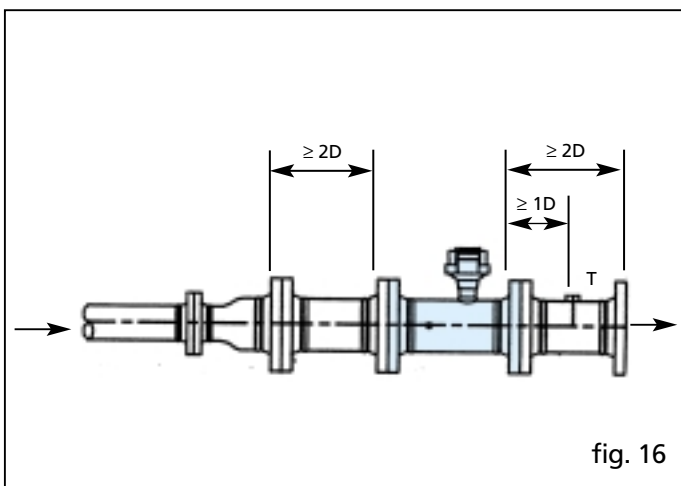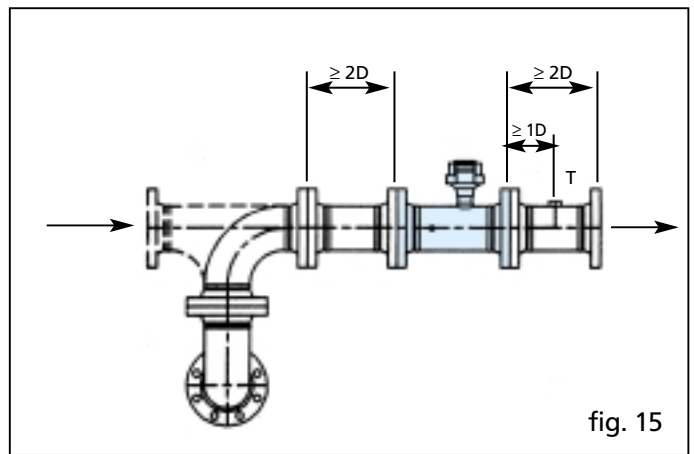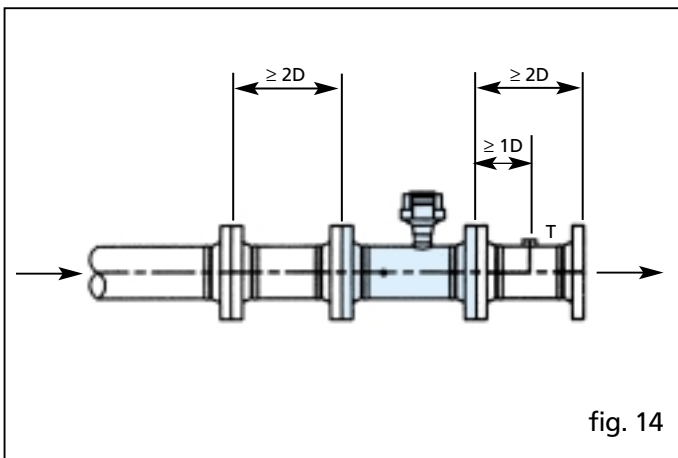

The gas piping must be clean and free of sand, dirt, metal filings, and other foreign particles and liquids. It is recommended that a filter of 5 micron mesh be installed upstream of the meter.

Position the gaskets with care, ensuring that there is no protrusion into the flow which would cause a disturbance to the flow.

Tighten the bolts evenly and with equal force.

The Multi-index can be rotated up to 350° for easier reading.

Slowly pressurise the installation, to prevent overspeeding or damaging the meter. Bringing the meter into service should also be done slowly.

LUBRICATION

The frequency of lubricating a meter depends on the operating conditions. A meter operating in dirty gas needs to be lubricated more often than a meter operating in clean gas.

Under normal conditions meters should be lubricated 2 to 3 times a year.

Recommended quantity of oil:

| | |
|------------------------|--------|
| 50/80 mm (2/3") meters | 0.2 cc |
| 100 mm (4") | " 2 " |
| 150 mm (6") | " 3 " |
| 200 mm (8") | " 4 " |
| 250 mm (10") | " 5 " |
| 300 mm (12") | " 6 " |
| 400 mm (16") | " 8 " |
| 500 mm (20") | " 10 " |
| 600 mm (24") | " 12 " |

Lubricating oil: ISOFLEX PDP 38.
For special applications contact Instromet for advice.

Special lubrication systems are available minimising the risk of pollution of the oil.

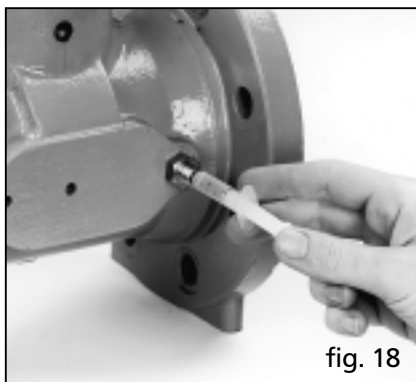


fig. 18

Oil Injection-System

Supplied with 50 mm (2") to 200 mm (8") meters with a pressure rating of PN 10/16 and ANSI 125.



fig. 20

Push Button Pump

Standard on 50 mm (2") and 80 mm (3") meters in pressure ranges up to 100 bar. 0.1 cc per push.



fig. 19

Small Oil pump

Standard on 100 mm (4"), 150 mm (6") and 200 mm (8") meters in all pressure ranges up to 100 bar. 0.5 cc per stroke.



fig. 21

Large Oil Pump

Standard on 250 mm (10") meters and larger in all pressure ranges up to 100 bar. 1 cc per stroke.

HIGH PRESSURE CALIBRATION FACILITY

Instromet possesses a unique high pressure calibration facility, approved by the Dutch legal metrology service NMI. Systematic testing of meters with high pressure natural gas gives Instromet a powerful tool to further improve its turbine meters within the framework of its ISO 9001 approval.



fig. 22


fig. 22
Instromet Natural Gas High Pressure Calibration Facility in Utrecht, The Netherlands

DIMENSIONS AND WEIGHTS

| Sizes mm (inch) | G- Rating | A | B | E | H | Over- all length | Pressure rating | Body material | Wgt. kg. | Pressure rating | Body material | Wgt. kg |
|-----------------------|------------------------|-----|------|------|-----|------------------------|---|------------------|-------------|--------------------|------------------|------------|
| 50 (2") | 40 65 | 60 | N.A. | N.A. | 235 | 150 | ND 10/16 ANSI 125/150 | GGG 40 | 10 | ND 100 | St | 26 |
| | | | | | | | | | 10 | ANSI 150 | | 18 |
| | | | | | | | ND 10/16 ND 25/40 ND 64 | St | 20 | ANSI 300 | | 20 |
| | | | | | | | | | 20 | ANSI 400 | | 20 |
| | | | | | | | | 23 | ANSI 600 | | 20 | |
| 80 (3") | 100 160 250 | 96 | N.A. | N.A. | 205 | 240 | ND 10/16 ANSI 125/150 | GGG 40 | 15 | ND 100 | St | 34 |
| | | | | | | | | | 15 | ANSI 150 | | 24 |
| | | | | | | | ND 10/16 ND 25/40 ND 64 | St | 26 | ANSI 300 | | 28 |
| | | | | | | | | | 26 | ANSI 400 | | 28 |
| | | | | | | | | 30 | ANSI 600 | | 28 | |
| 100 (4") | 160 250 400 | 120 | 130 | 210 | 218 | 300 | ND 10/16 ANSI 125/150 | GGG 40 | 28 | ND 100 | St | 46 |
| | | | | | | | | | 28 | ANSI 150 | | 35 |
| | | | | | | | ND 10/16 ND 25/40 ND 64 | St | 30 | ANSI 300 | | 42 |
| | | | | | | | | | 38 | ANSI 400 | | 42 |
| | | | | | | | | 40 | ANSI 600 | | 50 | |
| 150 (6") | 400 650 1000 | 180 | 180 | 247 | 273 | 450 | ND 10/16 ANSI 125/150 | GGG 40 | 44 | ND 100 | St | 87 |
| | | | | | | | | | 44 | ANSI 150 | | 48 |
| | | | | | | | ND 10/16 ND 25/40 ND 64 | St | 42 | ANSI 300 | | 66 |
| | | | | | | | | | 50 | ANSI 400 | | 77 |
| | | | | | | | | 72 | ANSI 600 | | 98 | |
| 200 (8") | 650 1000 1600 | 240 | 240 | 273 | 298 | 600 | ND 10 ND 16 ANSI 125/150 | GGG 40 | 70 | ND 40 | St | 98 |
| | | | | | | | | | 70 | ND 64 | | 125 |
| | | | | | | | | | 70 | ND 100 | | 161 |
| | | | | | | | | | | ANSI 150 | | 91 |
| | | | | | | | | 77 | ANSI 300 | | 117 | |
| | | | | | | | | 77 | ANSI 400 | | 135 | |
| | | | | | | | | 89 | ANSI 600 | | 155 | |
| 250 (10") | 1000 1600 2500 | 300 | 360 | 327 | 314 | 750 | ND 10 ND 16 ND 25 ND 40 ND 64 ND 100 | St | 90 | ANSI 150 | St | 108 |
| | | | | | | | | | 95 | ANSI 300 | | 148 |
| | | | | | | | | | 108 | ANSI 400 | | 170 |
| | | | | | | | | | 128 | ANSI 600 | | 236 |
| | | | | | | | | 156 | | | 236 | |
| | | | | | | | | 220 | | | | |
| 300 (12") | 1600 2500 4000 | 360 | 390 | 352 | 338 | 900 | ND 10 ND 16 ND 25 ND 40 ND 64 ND 100 | St | 120 | ANSI 150 | St | 160 |
| | | | | | | | | | 130 | ANSI 300 | | 210 |
| | | | | | | | | | 150 | ANSI 400 | | 240 |
| | | | | | | | | | 180 | ANSI 600 | | 290 |
| | | | | | | | | 240 | | | | |
| | | | | | | | | 340 | | | | |
| 400 (16") | 2500 4000 6500 | 480 | 510 | 395 | 380 | 1200 | ND 10 ND 16 ND 25 ND 40 ND 64 | St | 350 | ANSI 150 | St | 400 |
| | | | | | | | | | 380 | ANSI 300 | | 460 |
| | | | | | | | | | 410 | | | |
| | | | | | | | | | 460 | ANSI 400 | | 490 |
| | | | | | | | | 510 | ANSI 600 | | 580 | |
| 500 (20") | 4000 6500 10000 | 600 | 630 | 445 | 431 | 1500 | ND 10 ND 16 ND 25 ND 40 | St | 550 | ANSI 150 | St | 650 |
| | | | | | | | | | 600 | ANSI 300 | | 800 |
| | | | | | | | | | 640 | ANSI 400 | | 830 |
| | | | | | | | | | 690 | ANSI 600 | | 980 |
| 600 (24") | 6500 10000 16000 | 720 | 750 | 495 | 482 | 1800 | ND 10 ND 16 ND 25 | St | 900 | ANSI 150 | St | 1050 |
| | | | | | | | | | 950 | ANSI 300 | | 1300 |
| | | | | | | | | | 1000 | ANSI 400 | | 1350 |
| | | | | | | | | | | ANSI 600 | | 1500 |

N.A. = Not Applicable St = Steel GGG 40 = Ductile Iron

DIMENSIONS

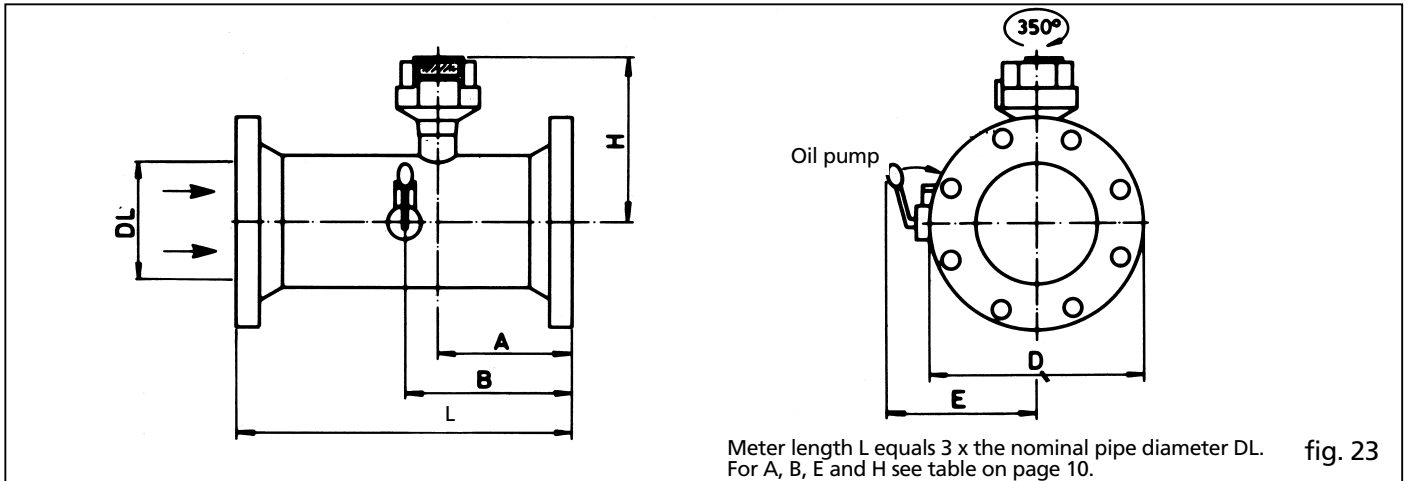

MATERIAL SPECIFICATIONS

| | | | |
|--|---|--|---|
| Body: | Meter with DIN flanges: Connection DN 50 - DN 200, PN10/16 Ductile Iron GGG 40 Connection DN 50 - DN 600, PN10- PN 100 Steel [DN 50, (2") - flangeless] | Surface coating: | Ductile iron: phosphate, primer, top coat Steel: sand blasting, primer, top coat |
| | Meter with ANSI flanges: Connection DN 50 - DN 200, (2" - 8") ANSI 125/150 Ductile Iron GGG 40 | Bearings: | Stainless steel |
| | Connection DN 50 - DN 600, (2" - 24") Steel [DN 50, (2") - flangeless] ANSI 150 - ANSI 600 | Shafts: | Stainless steel |
| Meter bodies are constructed in accordance with many pressure vessel codes. The standard construction is in accordance with the Dutch Stoomwezen Code. | Magnetic coupling: | Ferroxdure magnets in stainless steel bushing and aluminium hubs | |
| Turbine wheel: | Meters sized 150 mm (6") and smaller with a working pressure to 10 bar (ANSI 150) can be fitted with either an aluminium or a delrin turbine wheel. An aluminium turbine, machined from solid stock, is standard for all other sizes and pressures. | Screws and bolts: | Stainless steel |
| | | Meter module: | Aluminium |
| | | O-rings: | Viton® / NBR |
| | | Gears: | In contact with gas: Polyacetal resin and stainless steel; in the index: Polyacetal resin |
| | Oil pumps: | Chrome plated brass or steel | |
| | Index head: | Aluminium | |

Note: Special materials available on request. The internals can be coated for service with corrosive gases.

FURTHER INFORMATION

Publications by INSTROMET:

- Turbine Gas Meter Handbook.
- P-Meter Handbook (Ethylene).
- SM-RI Turbine Gas Meters - Installation and Maintenance Instructions.
- Systems Handbook.
- Regulator Station Handbook

International Reference Material:

- ISO 9951: 1993, Measurement of gas flow in closed conduits - Turbine meters.
- OIML R6, General specifications for gas volume meters.
- OIML R32, Rotary piston meters and turbine gas meters.
- AGA Report No. 7, Measurement of fuel gas by turbine meters.

Sales Offices:

In Argentina:
INSTROMET S.A.

In Australia:
INSTROMET SYSTEMS AUSTRALIA PTY. LTD.

In Austria:
INSTROMET B.V. GES.M.B.H.

In Belgium:
INSTROMET INTERNATIONAL N.V.

In Brazil:
INSTROMET MEDIÇÃO E CONTROLE LTDA.

In China:
INSTROMET CHINA, BEIJING-OFFICE

In Croatia:
INSTROMET CROATIA

In France:
INSTROMET S.A.R.L.

In Germany:
INSTROMET G.M.B.H.

In Hungary:
INSTROMET HUNGARY

In India:
SIDDHA GAS INSTROMET INDIA PVT. LTD.

In Italy:
INSTROMET ITALIA S.R.L.

In Korea:
INSTROMET KOREA LTD.

In Malaysia:
INSTROMET INTERNATIONAL
REGIONAL OFFICE, SOUTH EAST ASIA

In the Netherlands:
INSTROMET B.V.

In New Zealand:
INSTROMET SYSTEMS NEW ZEALAND

In Nigeria:
INSTROMET WEST AFRICA B.V.

In Poland:
INSTROMET POLSKA

In Portugal:
INSTROMET PORTUGAL LDA.

In Spain:
INSTROMET GAS S.L.

In Switzerland:
INSTROMET AG.

In the UK:
INSTROMET UK

In the Ukraine:
INSTROMET UKRAINE LTD.

In the USA:
INSTROMET INC.

INSTROMET has agents and representatives worldwide.

YOUR SALES OFFICE OR REPRESENTATIVE:


INSTROMET has a continuing program of product research and development. Technical specifications and construction may change due to improvements. This publication serves as general information only, and all specifications are subject to confirmation by INSTROMET.

Products & Services:

- Ultrasonic gas meters
- Turbine gas meters
- Rotary gas meters
- Insertion gas meters
- Electronic volume correctors
- Flow computer systems
- Calorimeters
- Gas chromatographs
- Supervisory Systems
- Gas filters
- Gas pressure regulators
- Safety shut-off valves
- Telemetry systems
- Electronic metering and control systems
- Calibration and test installations
- Complete gas measurement and control stations
- Commissioning, servicing, training and consulting



For your nearest sales office or representative please contact:
INSTROMET INTERNATIONAL
Rijkmakerlaan 9 - B-2910 ESSEN - BELGIUM
Tel: +32 3 6700 700 - Fax: +32 3 667 6940
E-mail: sales@instromet.be
Web-page: <http://www.instromet.com>



Instromet®

Gas measurement and control equipment